

## TECHNICAL FEATURES

### SCOPE

ARCO compression fitting series are designed for being connected to water pipe system and heating installations.

Range size:	16 x 2,00 - 20 x 2,00 - 26 x 3,00 - 32 x 3,00
Figures:	Unions: Female, male, equal and reduced
	Elbows: Female, male, wall plate and equal
	Tees: Female, equal and reduced




### SERVICE CONDITIONS

Nominal pressure:	16 bar
Test pressure:	25 bar
Temperature range:	Cold and hot water up to 95°C
Fluid:	water

### COMPONENTS, TREATMENTS AND MARKS

ITEM	COMPONENT	MATERIAL	TREATMENT
1	Main body	European Brass	Nickel plated
2	Sleeve	European Brass	Cleaned
3	Nut	European Brass	Nickel plated
4	O-rings	EPDM	

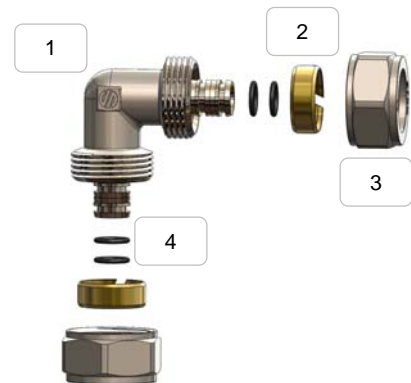

ITEM	COMPONENT	MARKS
1	Main body	Stamping bodies: logo and size Machining bodies: no marks
2	Sleeve	Logo and size
3	Nut	Logo and size
4	O-rings	No marks

## MAIN FEATURES

### ONE BODY PIECES.

Main body and nozzle are manufactured in one piece with CW614N or CW617N European brass, avoiding any possibility of leaks.

### ONE PIECES FOR TWO TUBES.

Our compression fittings can work properly with ARCOPEX (PEX tube) and ARCOKAPA (Multilayer tube). The same fitting can work interchangeably with any of our two tubes, no need to have a stock of accessories for PEX pipe and a Multilayer tube

### DOUBLE O-RING.

Double o-rings per nozzle to increase its performance.

## PACKAGING

Fittings will be packaged in bags of 5 or 10 units, depending on their size and type of item. The outer carton is in a ARCO box, with amounts ranging from 50 to 150 units.